


CABLEMOUNT MOUNT SERIES: CM01878

Dimensions & Load Ratings

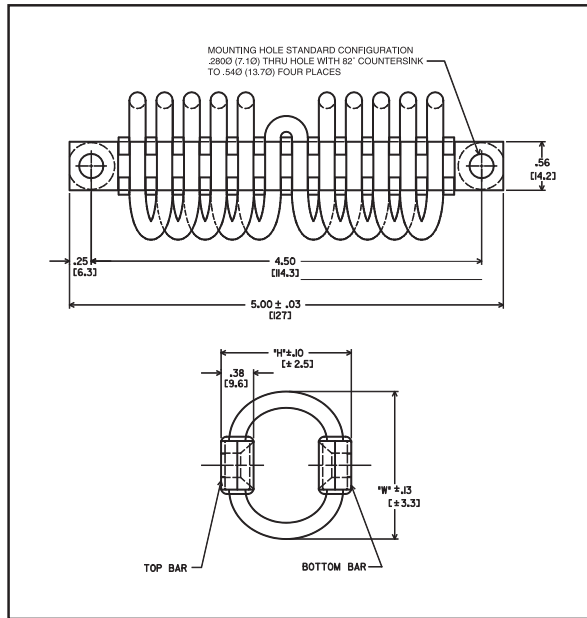

SUFFIX	MOUNTING HOLE CONFIGURATION
NONE	Standard Configuration as shown in drawing
- A	1/4 -20 Threaded inserts in both retaining bars
- B	1/4 -20 Threaded inserts in one retaining bar and standard configuration as shown in drawing in other retaining bar
- C	M6 x 1.0 Threaded inserts in both retaining bars
- D	M6 x 1.0 Threaded inserts in one retaining bar and standard configuration as shown in drawing in other retaining bar w/90° countersink
- E	Standard configuration as shown in drawing w/ 90° countersink

PART #	DIMENSIONS		COMPRESSION		SHEAR		ROLL		45° COMP/ROLL	
	H	W	Load Rating	Max. Deflection	Load Rating	Max. Deflection	Load Rating	Max. Deflection	Load Rating	Max. Deflection
CM01878-1	1.20	1.40	325	.3	160	.4	90	.4	370	.4
CM01878-2	1.30	1.50	190	.3	58	.4	63	.4	250	.6
CM01878-3	1.40	1.60	165	.4	55	.5	45	.5	230	.7
CM01878-4	1.50	1.70	150	.5	45	.5	35	.5	190	.9
CM01878-5	1.60	1.80	120	.7	38	.5	33	.5	150	.9
CM01878-6	1.70	1.90	100	.8	25	.6	31	.6	130	1.0

Natural Frequency at rated load = approx. 10 Hertz